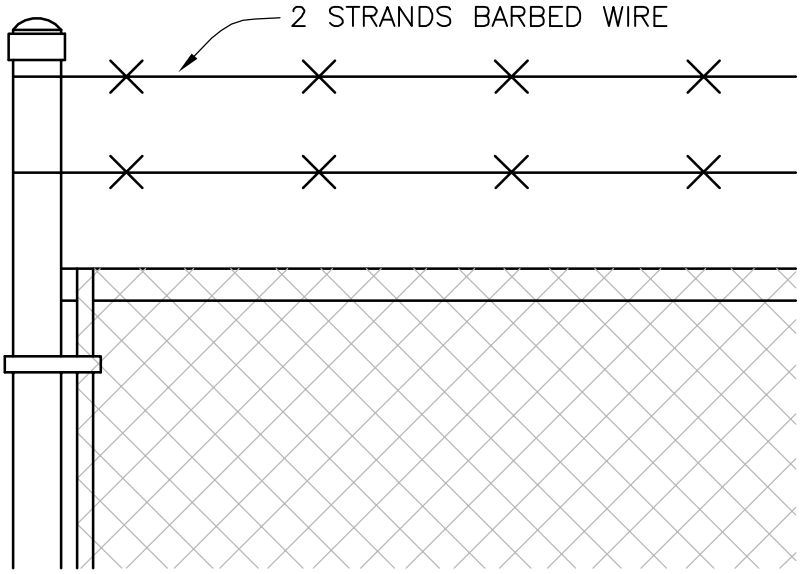

BARBED WIRE – 2 STRANDS, 12 1/2 GAUGE WIRE WITH 14 GAUGE 4 POINT BARBS SPACED APPROXIMATELY 6 INCHES APART. ALL WIRE SHALL BE ALUMINUM COATED WITH A MINIMUM COATING OF 0.25 OUNCES PER SQUARE FOOT OF SURFACE AREA.

BARBED WIRE SHALL BE DIRECTLY ATTACHED TO EACH CORNER AND GATE POST. BARBED WIRE SHALL BE ATTACHED TO EACH LINE POST AND PULL POST WITH A SUPPORTING ARM. SUPPORTING ARM SHALL SLOPE TO THE OUTSIDE OF THE FENCE AT A 45° ANGLE.

DM Approved	5/02/01 Date	City of Columbia Public Works Department	BARBED WIRE	21
Revisions				