


SERVICE LATERAL EXTENSION FROM DEEP SEWER

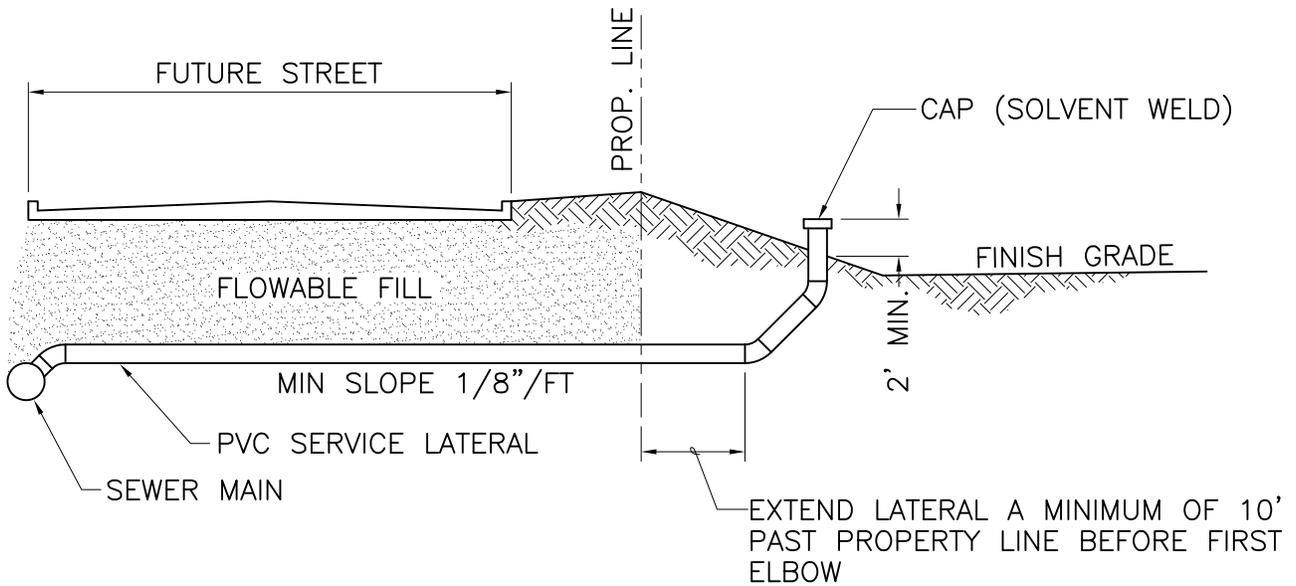

SERVICE LATERAL EXTENSION UNDER FUTURE STREETS

NOTE:

THIS DETAIL IS FOR USE WHENEVER LATERALS ARE EXTENDED FROM THE SEWER MAIN DURING NEW CONSTRUCTION. IN ALL CASES WHEN SERVICE LATERALS ARE EXTENDED THE PIPE SHALL EXTEND A MINIMUM OF TWO (2) FEET ABOVE THE PROPOSED FINAL GRADE AND SHALL BE FITTED WITH A CAP THAT IS SOLVENT WELDED IN PLACE.

<i>J.P.S.</i>	1/1/12
Approved	Date
Revisions	



LATERAL EXTENSION FOR NEW CONSTRUCTION