


Proposed Improvements - Providence Road to Seventh Street



LEGEND

DESCRIPTION

	<b>Ramp Modifications</b>	Alterations will be constructed that will bring sub-standard elements of the sidewalk ramp into conformance with current ADAAG 2010 Standards. This typically will include adding detectable warnings where they do not exist currently and/or providing for a contrasting color between the detectable warning and sidewalk.
	<b>Ramp Reconstruction</b>	Total reconstruction of sidewalk ramp will be required to conform with current ADAAG 2010 Standards.
	<b>Limits of Pavement Resurfacing</b>	The highlighted areas will be "milled" (grinding machine will removed the top few inches of the existing asphalt pavement), then a new asphalt riding surface will be placed. Vehicles can be driven on the milled roadway surface, so portions of Broadway will be closed primarily during milling and resurfacing activities only.

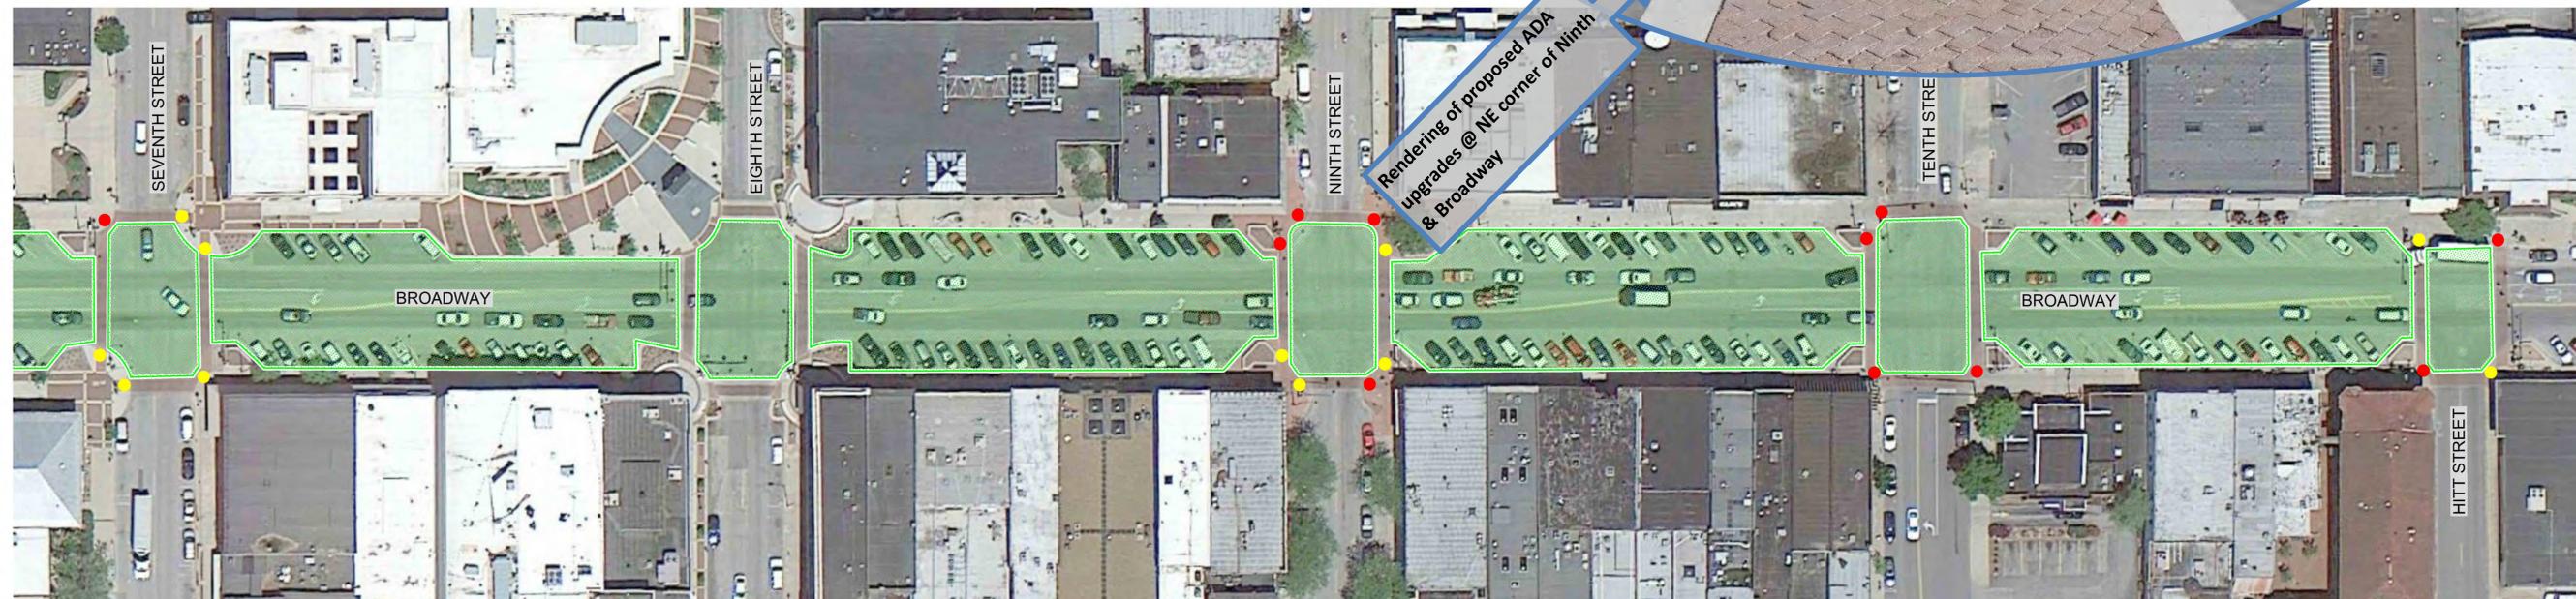

Proposed Improvements - Seventh Street to Hitt Street

Broadway Pavement Improvement Project  
Providence Road to Hitt Street

PROPOSED IMPROVEMENTS - PAVEMENT RESURFACING & SIDEWALK RAMPS

City of Columbia, Missouri

Department of Public Works

